




# SL Max 6 Panel System

## MANUFACTURER

Super Seamless of Canada  
Website: [superseamless.net](http://superseamless.net)  
Email: [info@superseamless.net](mailto:info@superseamless.net)  
Head Office:  
560 Henderson Drive  
Regina, SK S4N 5X2  
Phone: (306) 721-8001  
Fax: (306) 721-2624

## PRODUCT DATA SHEET

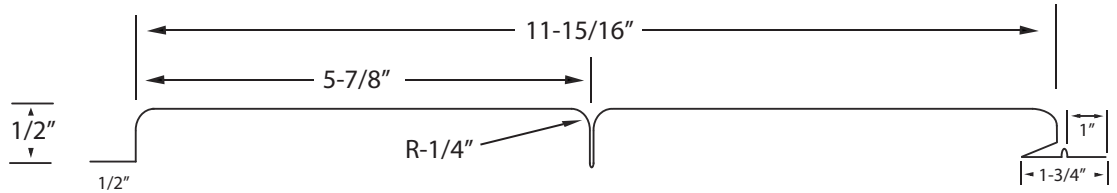

## PRODUCT DESCRIPTION

### Basic Uses:

SL Max 6 panels are 11-15/16" coverage with a 1/2" deep profile that shows v-rib shadow lines that are 5-7/8" on center. Typical applications include walls, soffit decorative accents.

The system utilizes concealed fasteners to offer uninterrupted vertical or horizontal sight lines

### Composition & Materials:

SL Max 6 panels are manufactured from 24 – 26 Gauge steel coil, including pvc, smtp and metallic finish's with over 50 different color offerings. Sizes:

SL Max 6 panels have a 12" wide nominal coverage. Panel lengths are cut to customer specifications, with a minimum of 2' and a maximum to transportation limitations and/or product and project design considerations.

### Colors & Finishes:

A choice of over 50 stock colors is available in a P.V.C, SMTP, TEX, PRINTECH color finishes. (Request color chart or chips). Other colors are available.

Perforations are available.

### MAINTENANCE

SL Max 6 panels are virtually maintenance free. Surface residue may be easily removed by conventional cleaning methods. For painted products, minor scratches should be touched up with a matching paint, available from the manufacturer.

### WARRANTY

Products finish carry a limited warranty against chalking and fading. Refer to coil manufacturer warranties per your product selection

## TECHNICAL DATA

Cascadia Printech  
24ga,AZ50  
Base metal is a 55% Aluminum-Zinc Alloy Coated Steel.  
Dry Film Thickness: ASTM D 1400-94,  
ASTM D 1005-95  
Specular Gloss: ASTM D 523-89 @ 60°  
Pencil Hardness: ASTM D 3363  
T-Bend Flexibility: ASTM D 4145-83  
(No crack, no pick-off)  
Mandrel Bend Flexibility: ASTM D 522-93A  
(180 bend around 1/8" mandrel)  
Adhesion: ASTM D 3359-95a  
(Reverse Impacted 1/16" crosshatched)  
Abrasion Resistance: ASTM D 968-93  
(to expose 5/32" of substrate)  
Acid Pollutant Resistance: ASTM D 1308-87  
(20% sulfuric acid 18 hrs .• 10% muriatic acid 15 minutes)  
Salt Spray: ASTM B 117 (5% salt spray @ 95°)  
Humidity Resistance: ASTM D 2247  
(100% relative humidity@ 95°)  
Color Retention, ASTM 2244 - Hunter Units  
(Florida Exposure @ 45° S)  
Chalking Resistance: ASTM D 4214  
(Florida Exposure @45° S)  
Graffiti Resistance: Cleanability of Defaced Panels  
(spray paint, pens, etc.)  
Reverse Impact: ASTM D 2794-93  
(3,000 x inches of metal thickness)  
Galvanized Steel: ASTM A 653  
55% Al-Zn alloy Coated Steel: ASTM A 792  
Film Integrity: 25 years - limited warranty  
Load Tables available upon request.



Super Seamless of Canada  
560 Henderson Drive  
Regina, SK S4N 5X2  
Phone : 306-721-8001  
[superseamless.net](http://superseamless.net)